



PROTER

GPG 4412DA SG30

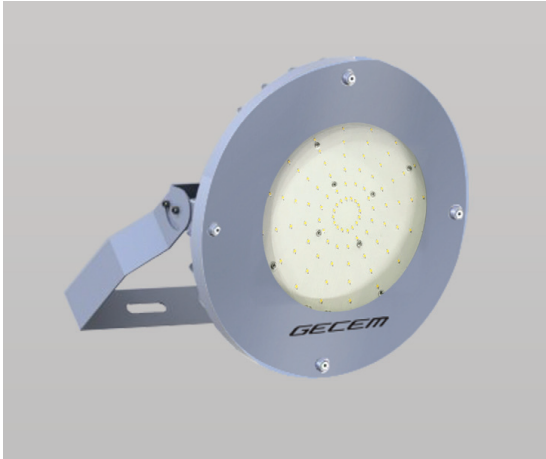

Product Features and Key Data

Applications :	Building sites - storage locations - container areas - warehouse - park
Luminaire Type :	LED highbay luminaire
Mounting Method :	Surface or on pole
Luminaire Optic :	Opal Glass
Connected Load :	120W
Colour Temperature :	3000K
Rated Luminous Flux :	12000 lm
Luminous Efficiency :	100 lm/W
Power Factor :	> 0,956
CRI Value :	> 80
UGR :	< 21 (EN124664-1)
Photo Biological Class :	Group 0 - No risk
Luminaire Colour :	Grey color
Luminaire Body :	Luminaire body die cast aluminium
Electrical version :	With electronic transformer, switchable.
Connection method :	Terminal
Mains frequency :	50/60 Hz
Mains voltage :	220 - 240 V
Led Service (25°) :	L80 = 50.000 h
Driver (220 - 240V) :	Tridonic, Osram
Ceiling Type :	AB - Gypsum Ceiling TB - Modular Ceiling KB - Clip-in Ceiling
Ingress Protection (IP) rating :	IP65
Protection class :	I
Impact resistance (IK) :	IK08
Hot wire resistance :	650 °C
Ambient temperature :	-35 - 55 °C
Options :	1 - 3 Hours Emergency Kit, Dali Dimmible
Accessories :	